

Reflectores Serie RGB



11-FLTYS-50-RGB

FLOOD COB PLANO 50W RGB C/CONTROL, 85-265V, BK




11-FLTYS-100-RGB

FLOOD COB PLANO 100W RGB C/CONTROL, 85-265V, BK



11-FLTYS-200-RGB

FLOOD COB PLANO 200W RGB C/CONTROL, 85-265V, BK

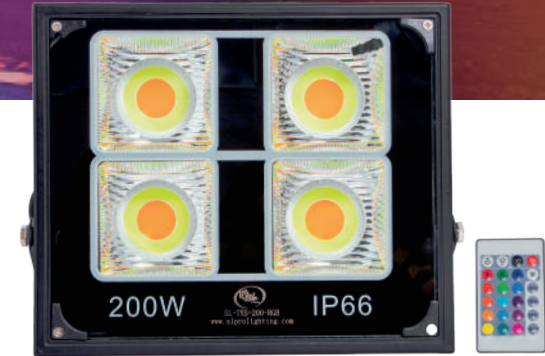

11-FLTYS-300-RGB

FLOOD COB PLANO 300W RGB C/CONTROL, 85-265V, BK



11-FLMY-400-RGB

FLOOD COB PLANO 400W RGB C/CONTROL, 85-265V, BK



MODELO



VOLTAJE



POTENCIA



TEMPERATURA (K)



INTENSIDAD (Lm)



ÁNGULO



MEDIDA (mm)



PESO (kg)

CARACTERÍSTICAS GENERALES:



Para exteriores



Fácil instalación



Horas de vida



| MODELO | VOLTAJE | POTENCIA | TEMPERATURA (K) | INTENSIDAD (Lm) | ÁNGULO | MEDIDA (mm) | PESO (kg) |
|------------------|---------|----------|-----------------|-----------------|--------|----------------------------|-----------|
| 11-FLTYS-50-RGB | 85-265V | 50W | - | - | 120° | Al: 155 x An: 180 x Pr: 45 | .700 |
| 11-FLTYS-100-RGB | 85-265V | 100W | - | - | 120° | Al: 180 x An: 210 x Pr: 47 | 1.025 |
| 11-FLTYS-200-RGB | 85-265V | 200W | - | - | 120° | Al: 240 x An: 285 x Pr: 47 | 1.865 |
| 11-FLTYS-300-RGB | 85-265V | 300W | - | - | 120° | Al: 265 x An: 345 x Pr: 50 | 2.525 |
| 11-FLMY-400-RGB | 85-265V | 400W | - | - | 120° | Al: 305 x An: 445 x Pr: 43 | 3.965 |

Reflectores Serie RGB-ARQUITECTONICA



30-PAR-C24-6IN1
PANEL DE 24 LEDS, 10W RGBAW+UV, 6IN1



11-PANEL-24*4
PANEL DE 24 LEDS, 8W RGBW, 4 EN 1



11-PANEL-24*4 W
PANEL DE 24 LEDS, 8W RGBW, 4 EN 1



11-GP2054A
PANEL 54 LEDS, 3W RGB, 3 EN 1



11-SLH20-A14
PAR 14 LEDS DE 10W RGBW, 4 IN 1



11-SPC045 BLACK
PAR 54 LEDS, 3W RGB



| MODELO | VOLTAJE | POTENCIA | TEMPERATURA (K) | INTENSIDAD (Lm) | ÁNGULO | MEDIDA (mm) | PESO (kg) | CARACTERÍSTICAS GENERALES: |
|-----------------|-------------|----------|-----------------|-----------------|--------|-----------------------------|-----------|----------------------------|
| 30-PAR-C24-6IN1 | AC 100-240V | 240W | - | - | 35° | At: 360 x An: 221 x Pr: 266 | 8.2 | <p>Para exteriores</p> |
| 11-PANEL-24*4 | AC 100-240V | 192W | - | - | 50° | At: 427 x An: 196 x Pr: 190 | 12.5 | |
| 11-PANEL-24*4 W | AC 100-240V | 192W | - | - | 50° | At: 427 x An: 196 x Pr: 190 | 12.5 | |
| 11-GP2054A | AC 100-240V | 162W | - | - | 60° | At: 360 x An: 221 x Pr: 266 | 8.2 | |
| 11-SLH20-A14 | AC 100-240V | 140W | - | - | 45° | At: 260 x An: 230 x Pr: 305 | 5.100 | |
| 11-SPC045 BLACK | AC 100-250V | 162W | - | - | 60° | At: 300 x An: 280 x Pr: 325 | 8.5 | |

Reflectores Serie RGB-ARQUITECTONICA



1-SFCL-003CW / 11-SFCL-003WW

BARRA DE LED 1X36 EXT LUZ FRÍA Y LUZ CÁLIDA, C/CONECTORES



11-SFCL-004CW / 11-SFCL-04WW

BARRA DE LED 1X36 EXT, LUZ FRÍA Y LUZ CÁLIDA, S/CONECTORES



30-BAROD-1815

BARRA 18 LEDS DE 15W, 6 EN 1 RGBWA+UV



| MODELO | VOLTAJE | POTENCIA | TEMPERATURA (K) | INTENSIDAD (Lm) | ÁNGULO | MEDIDA (mm) | PESO (kg) |
|---------------|-------------|----------|-----------------|-----------------|--------|-----------------------------|-----------|
| 11-SFCL-003CW | AC 85-265V | 36W | 6,500° | 3,240 | 60° | At: 1,000 x An: 60 x Pr: 95 | P |
| 11-SFCL-003WW | AC 85-265V | 36W | 3,000° | 2,880 | 60° | At: 1,000 x An: 60 x Pr: 95 | P |
| 11-SFCL-004CW | AC 100-240V | 36W | 6,500° | 3,240 | 60° | At: 1,000 x An: 60 x Pr: 95 | P |
| 11-SFCL-04WW | AC 100-240V | 36W | 3,000° | 2,880 | 60° | At: 1,000 x An: 60 x Pr: 95 | P |
| 30-BAROD-1815 | AC 100-250V | 270W | - | - | 60° | At: 106 x An: 120 x Pr: 160 | 8.0 |

CARACTERÍSTICAS GENERALES:



Para exteriores

